


OFX

OPEN FRAME TOUCH

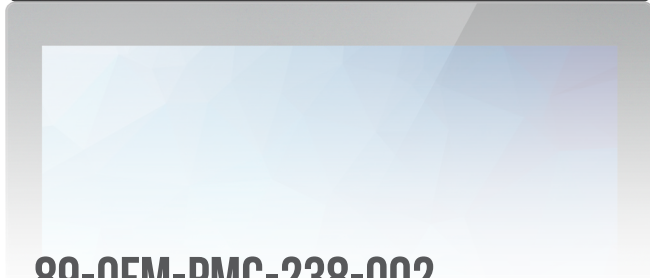

89-OFM-PMC-238-002

STANDARD CONFIGURATION

- Industrial-Grade LCD
- Multi-Touch Capacitive Sensor (G/G)
- Optically Bonded
- HDMI/DVI/VGA Input
- Powder Coated Steel Housing
- Rear VESA Mounts
- Optional Adjustable Flange Side-Mounts
- USB Plug-And-Play Windows 7+
- Power, Video, Touch Communication Cables Included

CUSTOMIZABLE FEATURES

- Sunlight Readable / Superbright / NVIS
- Android / Windows Integration
- Custom Cover Glass and Graphics
- Water Resistant Multi-touch
- Gloved Touch
- Ruggedization

SPECIFICATIONS

| DISPLAY | |
|-----------------------|----------------------------------|
| Size | 23.8" |
| Pixel Pitch | 0.2745 mm x 0.2745 mm |
| Resolution | 1920 x 1080 |
| Viewing Angle | 178° H / 178° V |
| Brightness | 400 nits |
| Support Color | 16.7 million |
| Response Time | 14 ms |
| Contrast Ratio | 1000 : 1 |
| Aspect Ratio | 16 : 9 |
| TOUCH SCREEN | |
| Technology | Projected Capacitive Multi-touch |
| Response Time | 5 ms |
| SYSTEM | |
| Connectivity | HDMI, VGA, DVI |
| OPERATING ENVIRONMENT | |
| Temperature | 0° to 50° C |
| PHYSICAL | |
| Enclosure Type | Open Frame |
| Mounting Options | Rear VESA, Optional Side Flanges |
| Frame Type | Powder-coated Aluminum |
| Weight | 15.9 lbs |
| WARRANTY | 1 yr Parts & Labor |

APPLICATIONS

- Aerospace
- Medical
- Industrial
- Transportation
- Retail & Public Use



sales@touchintl.com
www.touchinternational.com

2222 W Rundberg Ln., Ste. 200, Austin, TX, 78758
T: 512-832-8292 F: 512-832-8291



