


OFX

OPEN FRAME TOUCH

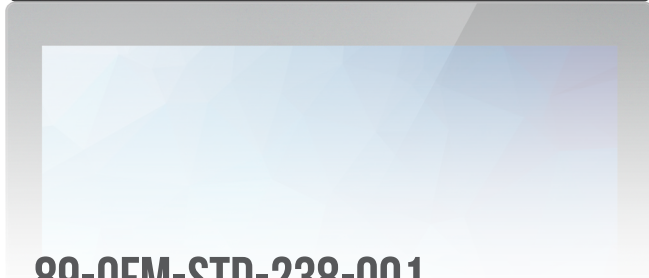

89-OFM-STD-238-001

STANDARD CONFIGURATION

- Industrial-Grade LCD
- Multi-Touch Capacitive Sensor (G/G)
- Optically Bonded
- HDMI/DVI/VGA Input
- Powder Coated Steel Housing
- Rear VESA Mounts
- Optional Adjustable Flange Side-Mounts
- USB Plug-And-Play Windows 7+
- Power, Video, Touch Communication Cables Included

CUSTOMIZABLE FEATURES

- Sunlight Readable / Superbright / NVIS
- Android / Windows Integration
- Custom Cover Glass and Graphics
- Water Resistant Multi-touch
- Gloved Touch
- Ruggedization

SPECIFICATIONS

DISPLAY

Size	23.8"
Pixel Pitch	0.2745 mm x 0.2745 mm
Resolution	1920 x 1080
Viewing Angle	178° H / 178° V
Brightness	400 nits
Support Color	16.7 million
Response Time	14 ms
Contrast Ratio	1000 : 1
Aspect Ratio	16 : 9

TOUCH SCREEN

Technology	Projected Capacitive Multi-touch
Response Time	< 10 ms

SYSTEM

Connectivity	HDMI, VGA, DVI
--------------	----------------

OPERATING ENVIRONMENT

Temperature	0° to 50° C
-------------	-------------

PHYSICAL

Enclosure Type	Open Frame
Mounting Options	Rear VESA, Optional Side Flanges
Frame Type	Powder-coated Aluminum
Weight	15.9 lbs

WARRANTY	1 yr Parts & Labor
----------	--------------------

APPLICATIONS

- Aerospace
- Medical
- Industrial
- Transportation
- Retail & Public Use



sales@touchintl.com
www.touchinternational.com

2222 W Rundberg Ln., Ste. 200, Austin, TX, 78758
T: 512-832-8292 F: 512-832-8291



