

# OFX

OPEN FRAME TOUCH

## SPECIFICATIONS



**89-OFM-STD-215-001**

### STANDARD CONFIGURATION

- Industrial-Grade LCD
- Multi-Touch Capacitive Sensor (G/G)
- Optically Bonded
- HDMI/DVI/VGA Input
- Powder Coated Steel Housing
- Rear VESA Mounts
- Optional Adjustable Flange Side-Mounts
- USB Plug-And-Play Windows 7+
- Power, Video, Touch Communication Cables Included

### CUSTOMIZABLE FEATURES


- Sunlight Readable / Superbright / NVIS
- Android / Windows Integration
- Custom Cover Glass and Graphics
- Water Resistant Multi-touch
- Gloved Touch
- Ruggedization

DISPLAY	
Size	21.5"
Pixel Pitch	0.24825 mm x 0.24825 mm
Resolution	1920 x 1080
Viewing Angle	178° H / 178° V
Brightness	250 nits
Support Color	16.7 million
Response Time	16 ms
Contrast Ratio	5000 : 1
Aspect Ratio	16 : 9
TOUCH SCREEN	
Technology	Projected Capacitive Multi-touch
Response Time	< 10 ms
SYSTEM	
Connectivity	HDMI, VGA, DVI
OPERATING ENVIRONMENT	
Temperature	0° to 60° C
PHYSICAL	
Enclosure Type	Open Frame
Mounting Options	Rear VESA, Optional Side Flanges
Frame Type	Powder-coated Aluminum
Weight	10.45 lbs
WARRANTY	
	1 yr Parts & Labor


### APPLICATIONS

- Aerospace
- Medical
- Industrial
- Transportation
- Retail & Public Use






TOP VIEW

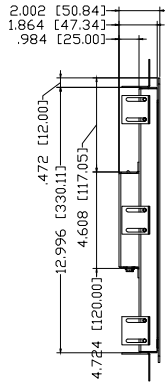


LEFT SIDE VIEW

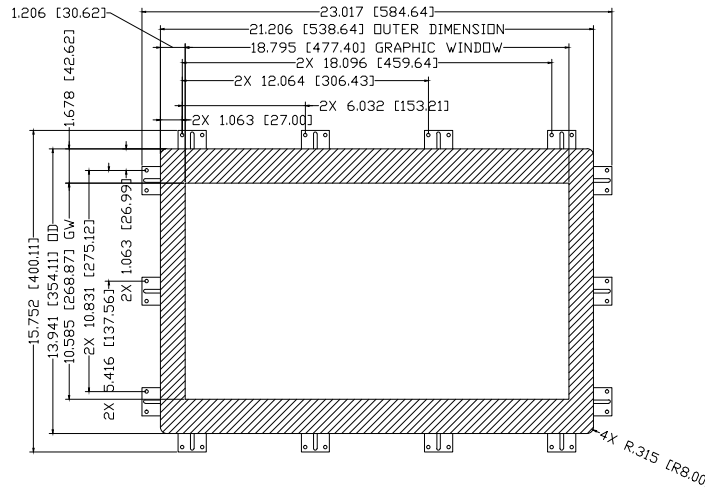


TOUCH SIDE VIEW

RIGHT SIDE VIEW



BOTTOM VIEW

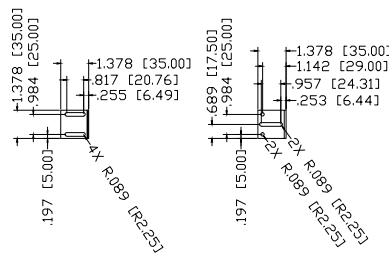

BRACKET DETAIL

